



PRELIMINARY

8042/8742 UNIVERSAL PERIPHERAL INTERFACE 8-BIT MICROCOMPUTER

- 8042/8742: 12 MHz
- Pin, Software and Architecturally Compatible with 8041A/8741A/8041AH
- 8-Bit CPU plus ROM, RAM, I/O, Timer and Clock in a Single Package
- 2048 x 8 ROM/EPROM, 128 x 8 RAM, 8-Bit Timer/Counter, 18 Programmable I/O Pins
- One 8-Bit Status and Two Data Registers for Asynchronous Slave-to-Master Interface
- DMA, Interrupt, or Polled Operation Supported
- Fully Compatible with MCS-48™, MCS-51™, MCS-80™, MCS-85™, and iAPX-86, 88 Microprocessor Families
- Interchangeable ROM and EPROM Versions
- Expandable I/O
- RAM Power-Down Capability
- Over 90 Instructions: 70% Single Byte
- Single 5V Supply

The Intel 8042/8742 is a general-purpose Universal Peripheral Interface that allows the designer to grow his own customized solution for peripheral device control. It contains a low-cost microcomputer with 2K of program memory, 128 bytes of data memory, 8-bit CPU, I/O ports, 8-bit timer/counter, and clock generator in a single 40-pin package. Interface registers are included to enable the UPI device to function as a peripheral controller in the MCS-48™, MCS-51™, MCS-80™, MCS-85™, iAPX-88, iAPX-86 and other 8-, 16-bit systems.

The 8042/8742 is software, pin, and architecturally compatible with the 8041AH, 8741A. The 8042/8742 doubles the on-chip memory space to allow for additional features and performance to be incorporated in upgraded 8041AH/8741A designs. For new designs, the additional memory and performance of the 8042/8742 extends the UPI concept to more complex motor control tasks, 80-column printers and process control applications as examples.

To allow full user flexibility, the program memory is available as ROM in the 8042 version or as UV-erasable EPROM in the 8742 version. The 8742 and the 8042 are fully pin compatible for easy transition from prototype to production level designs. The 8642 is a one-time programmable (at the factory) 8742 which can be ordered as the first 25 pieces of a new 8042 order. The substitution of 8642's for 8042's allows for very fast turnaround for initial code verification and evaluation results.

The device has two 8-bit, TTL compatible I/O ports and two test inputs. Individual port lines can function as either inputs or outputs under software control. I/O can be expanded with the 8243 device which is directly compatible and has 16 I/O lines. An 8-bit programmable timer/counter is included in the UPI device for generating timing sequences or counting external inputs. Additional UPI features include: single 5V supply, low power standby mode (in the 8042), single-step mode for debug, and dual working register banks.

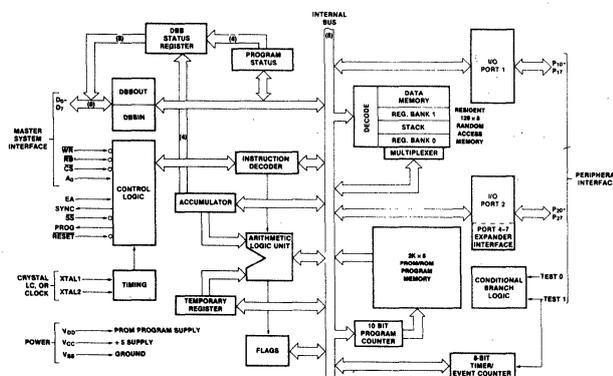


Figure 1. Block Diagram




Figure 2. Pin Configuration


Table 1. Pin Description

| Symbol | Pin No. | Type | Name and Function |
|---------------------------|---------|------|--|
| TEST 0, TEST 1 | 1 39 | I | <p>Test Inputs: Input pins which can be directly tested using conditional branch instructions.</p> <p>Frequency Reference: TEST 1 (T_1) also functions as the event timer input (under software control). TEST 0 (T_0) is used during PROM programming and verification in the 8742.</p> |
| XTAL 1, XTAL 2 | 2 3 | I | <p>Inputs: Inputs for a crystal, LC or an external timing signal to determine the internal oscillator frequency.</p> |
| $\overline{\text{RESET}}$ | 4 | I | <p>Reset: Input used to reset status flip-flops and to set the program counter to zero.</p> <p>$\overline{\text{RESET}}$ is also used during PROM programming and verification.</p> |
| $\overline{\text{SS}}$ | 5 | I | <p>Single Step: Single step input used in conjunction with the SYNC output to step the program through each instruction.</p> |
| $\overline{\text{CS}}$ | 6 | I | <p>Chip Select: Chip select input used to select one UPI microcomputer out of several connected to a common data bus.</p> |
| EA | 7 | I | <p>External Access: External access input which allows emulation, testing and PROM/ROM verification. This pin should be tied low if unused.</p> |
| $\overline{\text{RD}}$ | 8 | I | <p>Read: I/O read input which enables the master CPU to read data and status words from the OUTPUT DATA BUS BUFFER or status register.</p> |
| A_0 | 9 | I | <p>Command/Data Select: Address input used by the master processor to indicate whether byte transfer is data ($A_0=0$, F1 is reset) or command ($A_0=1$, F1 is set).</p> |
| $\overline{\text{WR}}$ | 10 | I | <p>Write: I/O write input which enables the master CPU to write data and command words to the UPI INPUT DATA BUS BUFFER.</p> |


| Symbol | Pin No. | Type | Name and Function |
|------------------------|----------------|------|--|
| SYNC | 11 | O | <p>Output Clock: Output signal which occurs once per UPI-42 instruction cycle. SYNC can be used as a strobe for external circuitry; it is also used to synchronize single step operation.</p> |
| D_0 - D_7 (BUS) | 12-19 | I/O | <p>Data Bus: Three-state, bidirectional DATA BUS BUFFER lines used to interface the UPI-42 microcomputer to an 8-bit master system data bus.</p> |
| P_{10} - P_{17} | 27-34 | I/O | <p>Port 1: 8-bit, PORT 1 quasi-bidirectional I/O lines.</p> |
| P_{20} - P_{27} | 21-24 35-38 | I/O | <p>Port 2: 8-bit, PORT 2 quasi-bidirectional I/O lines. The lower 4 bits (P_{20}-P_{23}) interface directly to the 8243 I/O expander device and contain address and data information during PORT 4-7 access. The upper 4 bits (P_{24}-P_{27}) can be programmed to provide interrupt Request and DMA Handshake capability. Software control can configure P_{24} as Output Buffer Full (OBF) interrupt, P_{25} as Input Buffer Full (IBF) interrupt, P_{26} as DMA Request (DRQ), and P_{27} as DMA ACKnowledge (DACK).</p> |
| PROG | 25 | I/O | <p>Program: Multifunction pin used as the program pulse input during PROM programming.</p> <p>During I/O expander access the PROG pin acts as an address/data strobe to the 8243. This pin should be tied high if unused.</p> |
| V_{CC} | 40 | | <p>Power: +5V main power supply pin.</p> |
| V_{DD} | 26 | | <p>Power: +5V during normal operation. +21V during programming operation. Low power standby pin in ROM version.</p> |
| V_{SS} | 20 | | <p>Ground: Circuit ground potential.</p> |

UPI-42 FEATURES


- Two Data Bus Buffers, one for input and one for output. This allows a much cleaner Master/Slave protocol.

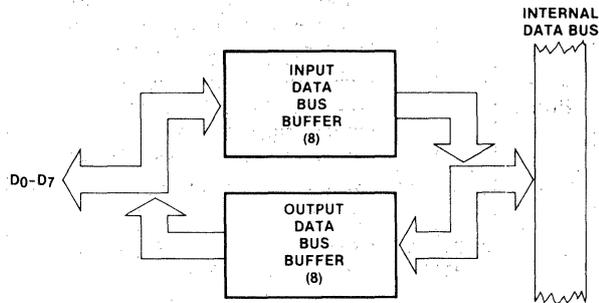

- 8 Bits of Status



ST₄-ST₇ are user definable status bits. These bits are defined by the "MOV STS, A" single byte, single cycle instruction. Bits 4-7 of the accumulator are moved to bits 4-7 of the status register. Bits 0-3 of the status register are not affected.



- \overline{RD} and \overline{WR} are edge triggered. IBF, OBF, F₁ and INT change internally after the trailing edge of \overline{RD} or \overline{WR} .




During the time that the host CPU is reading the status register, the 8042/8742 is prevented from updating this register or is 'locked out.'

- P₂₄ and P₂₅ are port pins or Buffer Flag pins which can be used to interrupt a master processor. These pins default to port pins on Reset.


If the "EN FLAGS" instruction has been executed, P₂₄ becomes the OBF (Output Buffer Full) pin. A "1" written to P₂₄ enables the OBF pin (the pin outputs the OBF Status Bit). A "0" written to P₂₄ disables the OBF pin (the pin remains low). This pin can be used to indicate that valid data is available from the UPI-41A (in Output Data Bus Buffer).

If "EN FLAGS" has been executed, P₂₅ becomes the \overline{IBF} (Input Buffer Full) pin. A "1" written to P₂₅ enables the \overline{IBF} pin (the pin outputs the inverse of the IBF Status Bit). A "0" written to P₂₅ disables the \overline{IBF}

pin (the pin remains low). This pin can be used to indicate that the UPI-42 is ready for data.

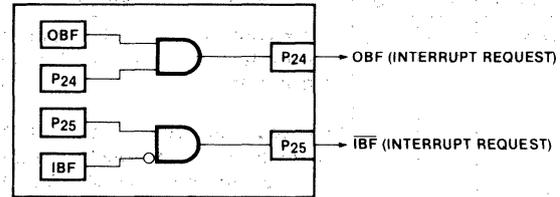


DATA BUS BUFFER INTERRUPT CAPABILITY




- P₂₆ and P₂₇ are port pins or DMA handshake pins for use with a DMA controller. These pins default to port pins on Reset.

If the "EN DMA" instruction has been executed, P₂₆ becomes the DRQ (DMA ReQuest) pin. A "1" written to P₂₆ causes a DMA request (DRQ is activated). DRQ is deactivated by DACK · RD, DACK · WR, or execution of the "EN DMA" instruction.

If "EN DMA" has been executed, P₂₇ becomes the \overline{DACK} (DMA ACKnowledge) pin. This pin acts as a chip select input for the Data Bus Buffer registers during DMA transfers.

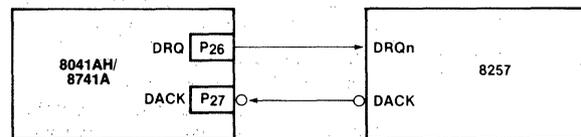

DMA HANDSHAKE CAPABILITY



- The RESET input on the 8042/8742 includes a 2-stage synchronizer to support reliable reset operation for 12 MHz operation.
- When EA is enabled on the 8042/8742, the program counter is placed on Port 1 and the lower three bits of Port 2 (MSB = P₂₂, LSB = P₁₀). On the 8042/8742 this information is multiplexed with PORT DATA (see port timing diagrams at end of this data sheet).
- The 8042/8742 supports single step mode as described in the pin description section.

APPLICATIONS

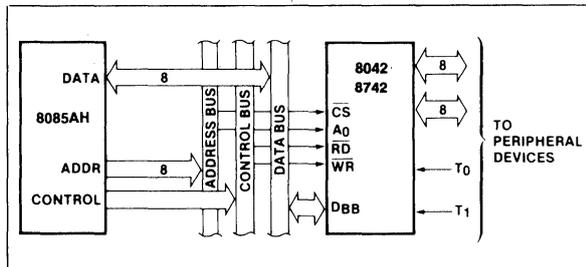


Figure 3. 8085AH-8042/8742 Interface

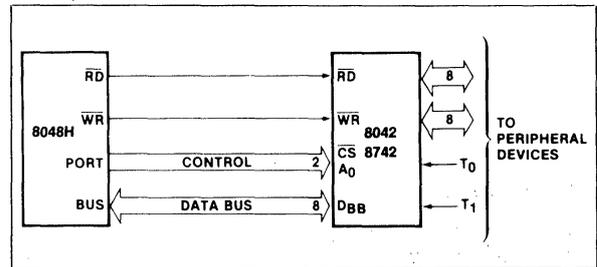


Figure 4. 8048H-8042/8742 Interface

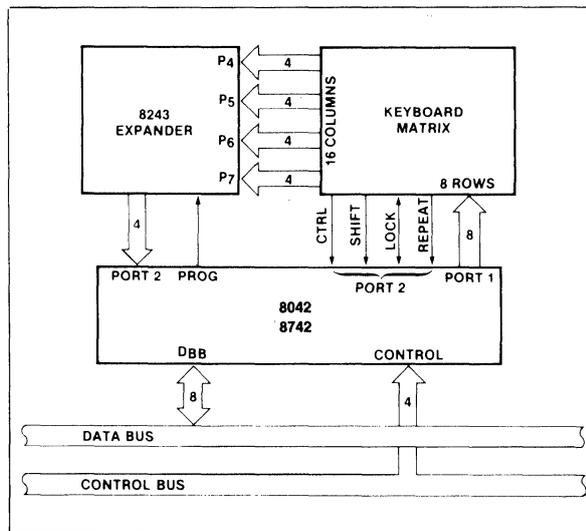


Figure 5. 8042/8742-8243 Keyboard Scanner

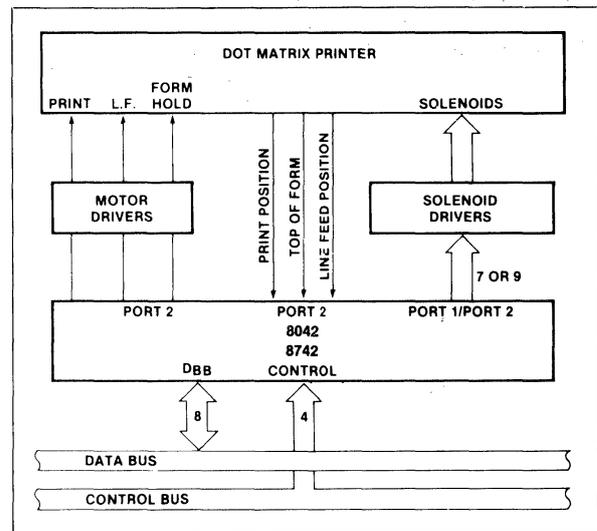


Figure 6. 8042/8742 80-Column Matrix Printer Interface

PROGRAMMING, VERIFYING, AND ERASING THE 8742 EPROM

Programming Verification

In brief, the programming process consists of: activating the program mode, applying an address, latching the address, applying data, and applying a programming pulse. Each word is programmed completely before moving on to the next and is followed by a verification step. The following is a list of the pins used for programming and a description of their functions:

| Pin | Function |
|-----------------|---|
| XTAL 1 | Clock Input (1 to 12MHz) |
| Reset | Initialization and Address Latching |
| Test 0 | Selection of Program or Verify Mode |
| EA | Activation of Program/Verify Modes |
| BUS | Address and Data Input Data Output During Verify |
| P20-1 | Address Input |
| V _{DD} | Programming Power Supply |
| PROG | Program Pulse Input |

WARNING

An attempt to program a missocketed 8742 will result in severe damage to the part. An indication of a properly socketed part is the appearance of the SYNC clock output. The lack of this clock may be used to disable the programmer.

The Program/Verify sequence is:

1. A₀ = 0V, CS = 5V, EA = 5V, RESET = 0V, TEST0 = 5V, V_{DD} = 5V, clock applied or internal oscillator operating, BUS and PROG floating.
2. Insert 8742 in programming socket
3. TEST 0 = 0v (select program mode)
4. EA = 21V (active program mode)*
5. Address applied to BUS and P₂₀₋₂₂
6. RESET = 5v (latch address)
7. Data applied to BUS**
8. V_{DD} = 21V (programming power)**
9. PROG = 0v followed by one 50 ms pulse to 21V**
10. V_{DD} = 5v
11. TEST 0 = 5v (verify mode)

12. Read and verify data on BUS
13. TEST 0 = 0v
14. RESET = 0v and repeat from step 5
15. Programmer should be at conditions of step 1 when 8742 is removed from socket

*When verifying ROM, EA = 12V.

**Not used in verifying ROM procedure.

8742 Erasure Characteristics

The erasure characteristics of the 8742 are such that erasure begins to occur when exposed to light with wavelengths shorter than approximately 4000 Angstroms (Å). It should be noted that sunlight and certain types of fluorescent lamps have wavelengths in the 3000-4000Å range. Data show that constant exposure to room level fluorescent lighting could erase the typical 8742 in approximately 3 years while it would take ap-

proximately one week to cause erasure when exposed to direct sunlight. If the 8742 is to be exposed to these types of lighting conditions for extended periods of time, opaque labels are available from Intel which should be placed over the 8742 window to prevent unintentional erasure.

The recommended erasure procedure for the 8742 is exposure to shortwave ultraviolet light which has a wavelength of 2537Å. The integrated dose (i.e., UV intensity x exposure time) for erasure should be a minimum of 15 w-sec/cm². The erasure time with this dosage is approximately 15 to 20 minutes using an ultraviolet lamp with a 12,000 μW/cm² power rating. The 8742 should be placed within one inch of the lamp tubes during erasure. Some lamps have a filter on their tubes which should be removed before erasure.

ABSOLUTE MAXIMUM RATINGS*

Ambient Temperature Under Bias 0°C to 70°C
 Storage Temperature - 65°C to + 150°C
 Voltage on Any Pin With Respect
 to Ground -0.5V to +7V
 Power Dissipation 1.5 Watt

**NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

D.C. CHARACTERISTICS ($T_A = 0^\circ$ to $+70^\circ\text{C}$, $V_{CC} = V_{DD} = +5V \pm 10\%$)

| Symbol | Parameter | 8042 | | 8742/8642 | | Units | Notes |
|-----------------------------------|---|------|-----------------|-----------|-----------------|---------|---|
| | | Min. | Max. | Min. | Max. | | |
| V _{IL} | Input Low Voltage (Except XTAL1, XTAL2, RESET) | -0.5 | 0.8 | -0.5 | 0.8 | V | |
| V _{IL1} | Input Low Voltage (XTAL1, XTAL2, RESET) | -0.5 | 0.6 | -0.5 | 0.6 | V | |
| V _{IH} | Input High Voltage (Except XTAL1, XTAL2, RESET) | 2.2 | V _{CC} | 2.2 | V _{CC} | V | |
| V _{IH1} | Input High Voltage (XTAL1, XTAL2, RESET) | 3.8 | V _{CC} | 3.8 | V _{CC} | V | |
| V _{OL} | Output Low Voltage (D ₀ -D ₇) | | 0.45 | | 0.45 | V | I _{OL} = 2.0 mA |
| V _{OL1} | Output Low Voltage (P ₁₀ P ₁₇ , P ₂₀ P ₂₇ , Sync) | | 0.45 | | 0.45 | V | I _{OL} = 1.6 mA |
| V _{OL2} | Output Low Voltage (PROG) | | 0.45 | | 0.45 | V | I _{OL} = 1.0 mA |
| V _{OH} | Output High Voltage (D ₀ -D ₇) | 2.4 | | 2.4 | | V | I _{OH} = - 400 μ A |
| V _{OH1} | Output High Voltage (All Other Outputs) | 2.4 | | 2.4 | | V | I _{OH} = - 50 μ A |
| I _{IL} | Input Leakage Current (T ₀ , T ₁ , RD, WR, CS, A ₀ , EA) | | ± 10 | | ± 10 | μ A | V _{SS} \leq V _{IN} \leq V _{CC} |
| I _{OZ} | Output Leakage Current (D ₀ -D ₇ , High Z State) | | ± 10 | | ± 10 | μ A | V _{SS} + 0.45 \leq V _{OUT} \leq V _{CC} |
| I _{LI} | Low Input Load Current (P ₁₀ P ₁₇ , P ₂₀ P ₂₇) | | 0.3 | | 0.3 | mA | V _{IL} = 0.8V |
| I _{LI1} | Low Input Load Current (RESET, SS) | | 0.2 | | 0.2 | mA | V _{IL} = 0.8V |
| I _{DD} | V _{DD} Supply Current | | 15 | | 15 | mA | Typical = 5 mA |
| I _{CC} + I _{DD} | Total Supply Current | | 125 | | 125 | mA | Typical = 60 mA |
| I _{IH} | Input Leakage Current | | 100 | | 100 | μ A | V _{IN} = V _{CC} |
| C _{IN} | Input Capacitance | | 10 | | 10 | pF | |
| C _{I/O} | I/O Capacitance | | 20 | | 20 | pF | |

D.C. CHARACTERISTICS—PROGRAMMING ($T_A = 25^\circ\text{C} \pm 5^\circ\text{C}$, $V_{CC} = 5V \pm 5\%$, $V_{DD} = 21V \pm 1V$)

| Symbol | Parameter | Min. | Max. | Unit | Test Conditions |
|-------------------|---|------|------|------|-----------------|
| V _{DOH} | V _{DD} Program Voltage High Level | 20.0 | 22.0 | V | |
| V _{DDL} | V _{DD} Voltage Low Level | 4.75 | 5.25 | V | |
| V _{PH} | PROG Program Voltage High Level | 21.5 | 24.5 | V | |
| V _P L | PROG Voltage Low Level | | 0.2 | V | |
| V _{EAH} | EA Program or Verify Voltage High Level | 21.5 | 24.5 | V | |
| V _{EAL} | EA Voltage Low Level | | 5.25 | V | |
| I _{DD} | V _{DD} High Voltage Supply Current | | 30.0 | mA | |
| I _{PROG} | PROG High Voltage Supply Current | | 16.0 | mA | |
| I _{EA} | EA High Voltage Supply Current | | 1.0 | mA | |

A.C. CHARACTERISTICS ($T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$, $V_{SS} = 0\text{V}$, $V_{CC} = V_{DD} = +5\text{V} \pm 10\%$)
DBB READ

| Symbol | Parameter | 8042 | | 8642/8742 | | Units |
|----------|-----------------------------------|------|------|-----------|------|------------------------------|
| | | Min. | Max. | Min. | Max. | |
| t_{AR} | CS, A_0 Setup to RD \bar{I} | 0 | | 0 | | ns |
| t_{RA} | CS, A_0 Hold After RD \bar{I} | 0 | | 0 | | ns |
| t_{RR} | RD Pulse Width | 160 | | 160 | | ns |
| t_{AD} | CS, A_0 to Data Out Delay | | 130 | | 130 | ns ^[1] |
| t_{RD} | RD \bar{I} to Data Out Delay | | 130 | | 130 | ns ^[1] |
| t_{DF} | RD \bar{I} to Data Float Delay | | 85 | | 85 | ns |
| t_{CY} | Cycle Time | 1.25 | 15 | 1.25 | 15 | μs ^[2] |

DBB WRITE

| Symbol | Parameter | Min. | Max. | Min. | Max. | Units |
|----------|-----------------------------------|------|------|------|------|-------|
| t_{AW} | CS, A_0 Setup to WR \bar{I} | 0 | | 0 | | ns |
| t_{WA} | CS, A_0 Hold After WR \bar{I} | 0 | | 0 | | ns |
| t_{WW} | WR Pulse Width | 160 | | 260 | | ns |
| t_{DW} | Data Setup to WR \bar{I} | 130 | | 150 | | ns |
| t_{WD} | Data Hold After WR \bar{I} | 0 | | 0 | | ns |

NOTES:

1. $C_L = 100\text{ pF}$.
2. 12 MHz XTAL.

A.C. CHARACTERISTICS—PROGRAMMING ($T_A = 25^\circ\text{C} \pm 5^\circ\text{C}$, $V_{CC} = 5\text{V} \pm 5\%$, $V_{DD} = 21\text{V} \pm 1\text{V}$)

| Symbol | Parameter | Min. | Max. | Unit | Test Conditions |
|------------|---|-----------|-----------|---------------|-----------------|
| t_{AW} | Address Setup Time to $\overline{\text{RESET}}$ \bar{I} | $4t_{cy}$ | | | |
| t_{WA} | Address Hold Time After $\overline{\text{RESET}}$ \bar{I} | $4t_{cy}$ | | | |
| t_{DW} | Data in Setup Time to PROG \bar{I} | $4t_{cy}$ | | | |
| t_{WD} | Data in Hold Time After PROG \bar{I} | $4t_{cy}$ | | | |
| t_{PH} | $\overline{\text{RESET}}$ Hold Time to Verify | $4t_{cy}$ | | | |
| t_{VDDW} | V_{DD} Setup Time to PROG \bar{I} | $4t_{cy}$ | | | |
| t_{VDDH} | V_{DD} Hold Time After PROG \bar{I} | 0 | | | |
| t_{PW} | Program Pulse Width | 50 | 60 | mS | |
| t_{TW} | Test 0 Setup Time for Program Mode | $4t_{cy}$ | | | |
| t_{WT} | Test 0 Hold Time After Program Mode | $4t_{cy}$ | | | |
| t_{DO} | Test 0 to Data Out Delay | | $4t_{cy}$ | | |
| t_{WW} | $\overline{\text{RESET}}$ Pulse Width to Latch Address | $4t_{cy}$ | | | |
| t_r, t_f | V_{DD} and PROG Rise and Fall Times | 0.5 | 2.0 | μs | |
| t_{CY} | CPU Operation Cycle Time | 5.0 | | μs | |
| t_{RE} | $\overline{\text{RESET}}$ Setup Time Before EA \bar{I} . | $4t_{cy}$ | | | |

Note: If TEST 0 is high, t_{DO} can be triggered by $\overline{\text{RESET}}$ \bar{I} .

A.C. CHARACTERISTICS DMA

| Symbol | Parameter | 8042 | | 8642/8742 | | Units |
|------------------|-------------------------|------|------|-----------|------|-------------------|
| | | Min. | Max. | Min. | Max. | |
| t _{ACC} | DACK to WR or RD | 0 | | 0 | | ns |
| t _{CAC} | RD or WR to DACK | 0 | | 0 | | ns |
| t _{ACD} | DACK to Data Valid | | 130 | | 130 | ns ⁽¹⁾ |
| t _{CRQ} | RD or WR to DRQ Cleared | | 90 | | 90 | ns |

NOTE:

1. C_L = 150 pF.

A.C. CHARACTERISTICS PORT 2 (T_A = 0°C to +70°C, V_{CC} = +5V ± 10%)


| Symbol | Parameter | 8042 | | 8642/8742 | | Units |
|-----------------|--|------|------|-----------|------|-------------------|
| | | Min. | Max. | Min. | Max. | |
| t _{CP} | Port Control Setup Before Falling Edge of PROG | 100 | | 100 | | ns ⁽¹⁾ |
| t _{PC} | Port Control Hold After Falling Edge of PROG | 60 | | 60 | | ns ⁽²⁾ |
| t _{PR} | PROG to Time P2 Input Must Be Valid | | 650 | | 650 | ns ⁽¹⁾ |
| t _{PF} | Input Data Hold Time | 0 | 150 | 0 | 150 | ns ⁽²⁾ |
| t _{DP} | Output Data Setup Time | 200 | | 200 | | ns ⁽¹⁾ |
| t _{PD} | Output Data Hold Time | 60 | | 60 | | ns ⁽²⁾ |
| t _{PP} | PROG Pulse Width | 700 | | 700 | | ns |

NOTES:


1. C_L = 80 pF.

2. C_L = 20 pF.


A.C. TESTING INPUT, OUTPUT WAVEFORM

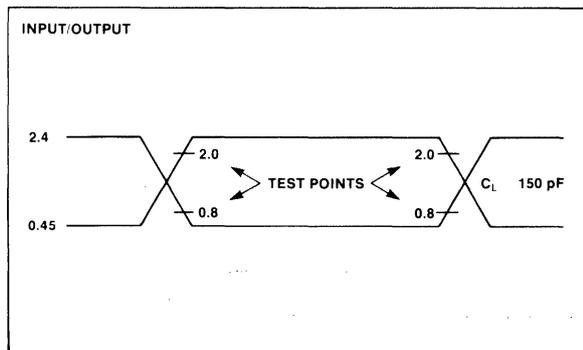


TYPICAL 8042/8742 CURRENT

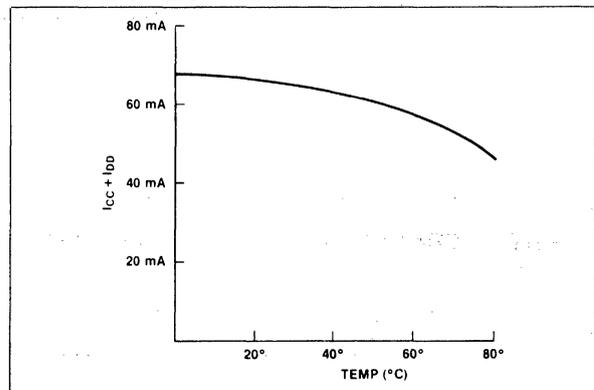


CRYSTAL OSCILLATOR MODE

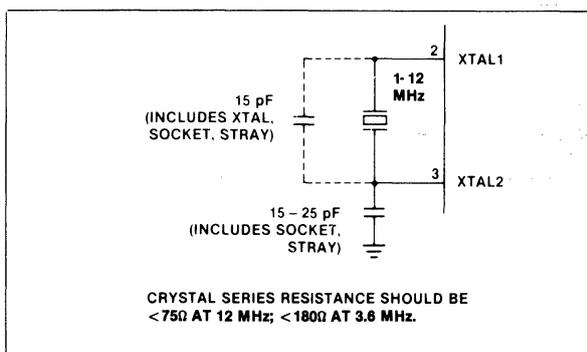

DRIVING FROM EXTERNAL SOURCE

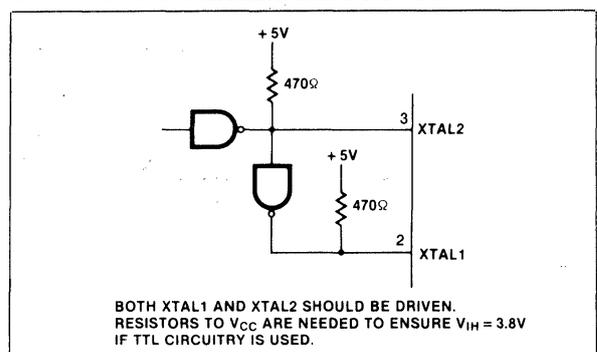


LC OSCILLATOR MODE

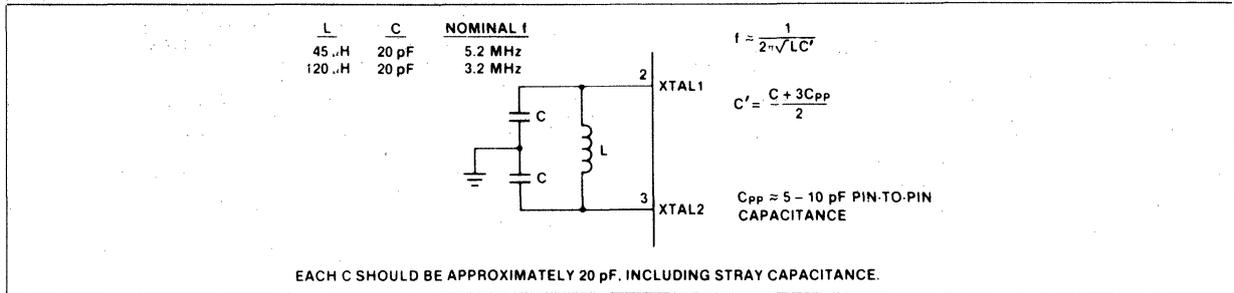


WAVEFORMS



READ OPERATION—DATA BUS BUFFER REGISTER

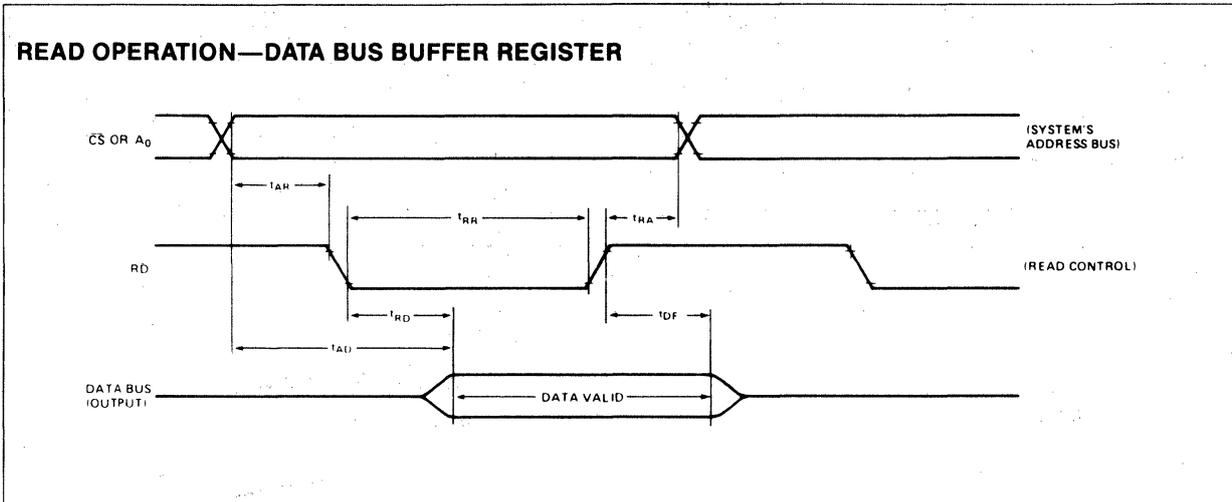

WRITE OPERATION—DATA BUS BUFFER REGISTER

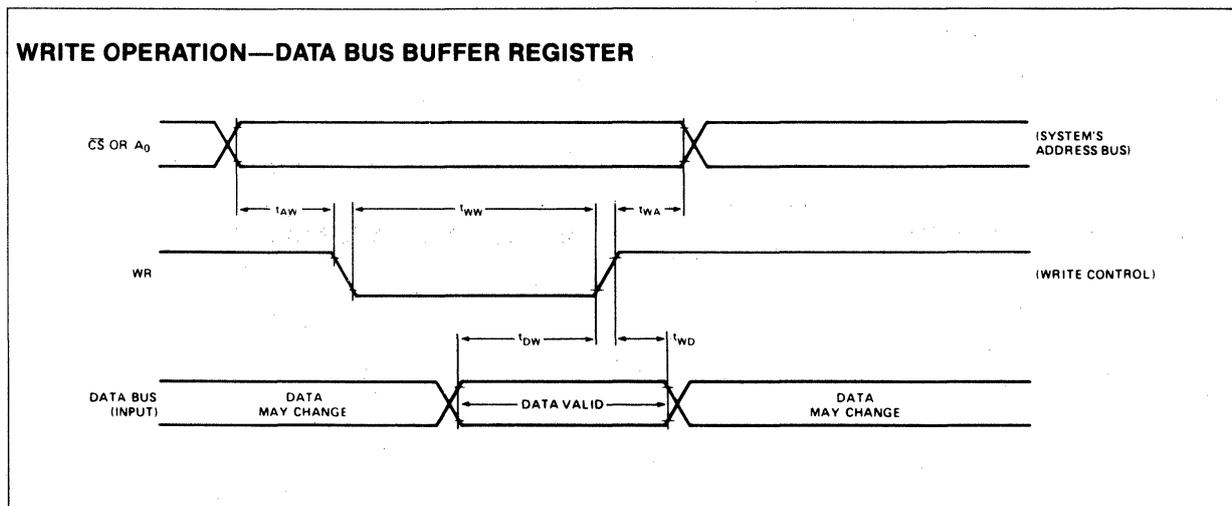

WAVEFORMS (Continued)

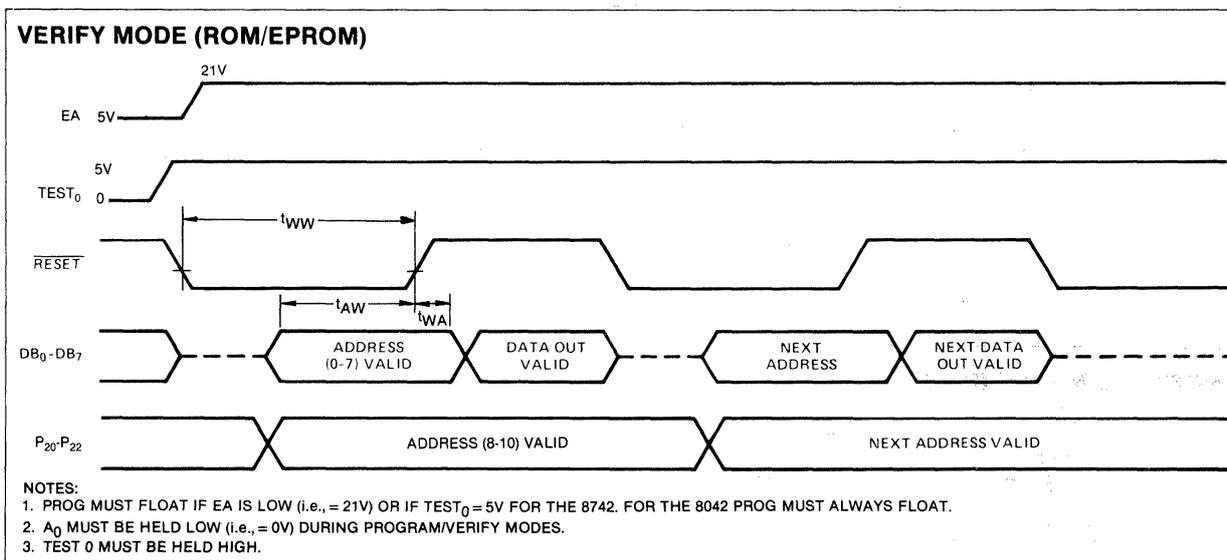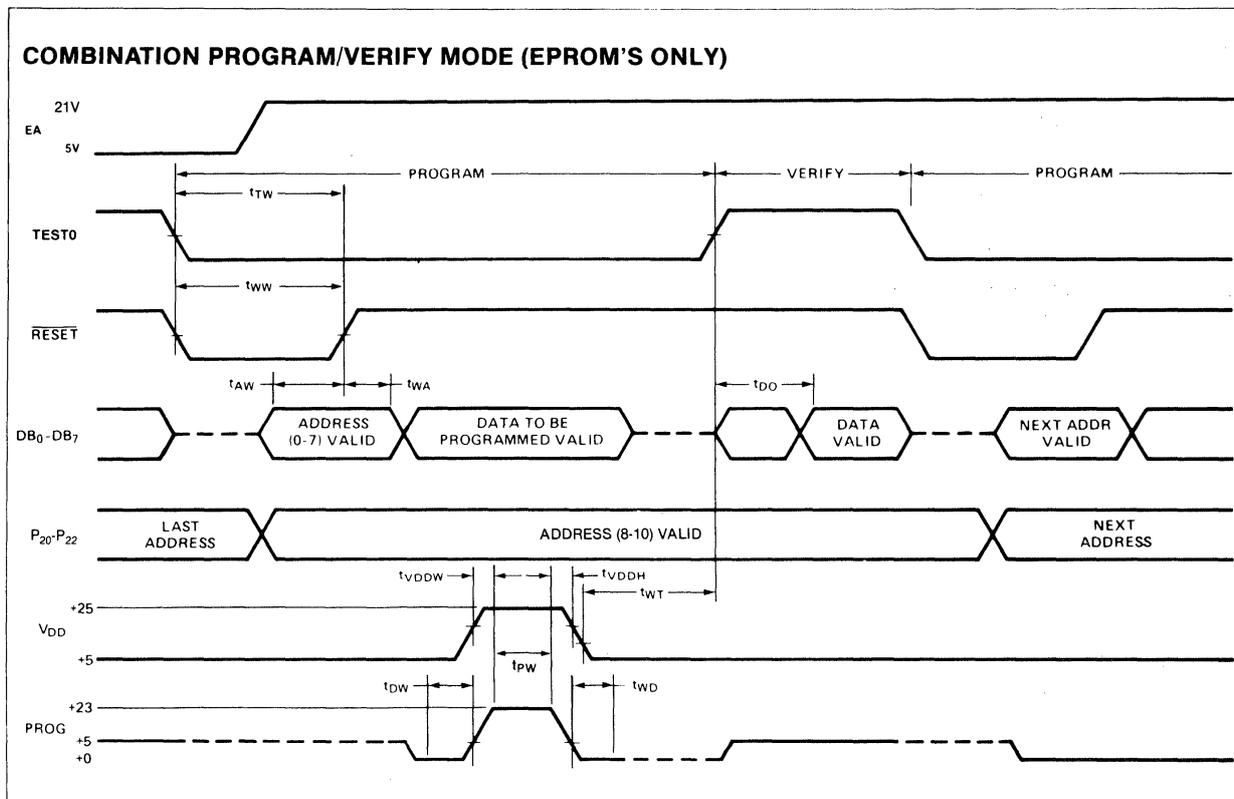

The 8742 EPROM can be programmed by the following Intel product:

1. Universal PROM Programmer (UPP series) peripheral of the Intellec® Development System with a UPP-549 Personality Card.

WAVEFORMS (Continued)

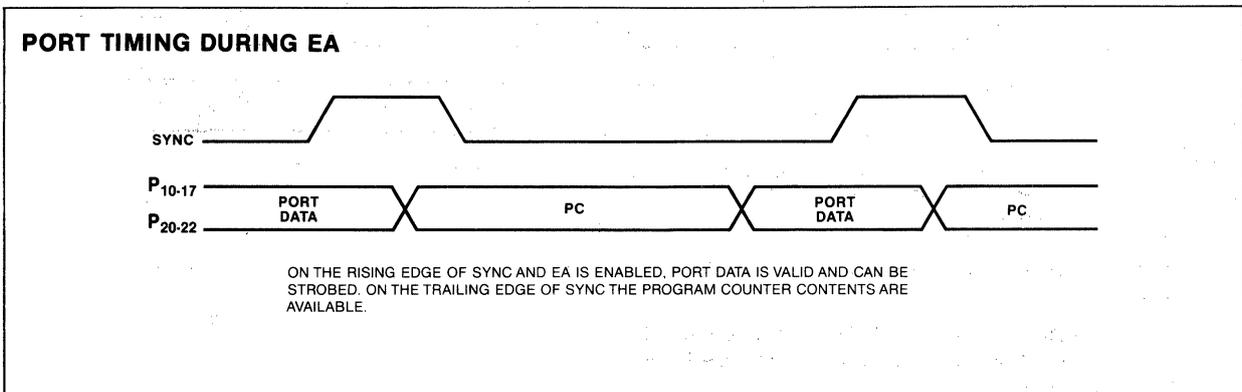
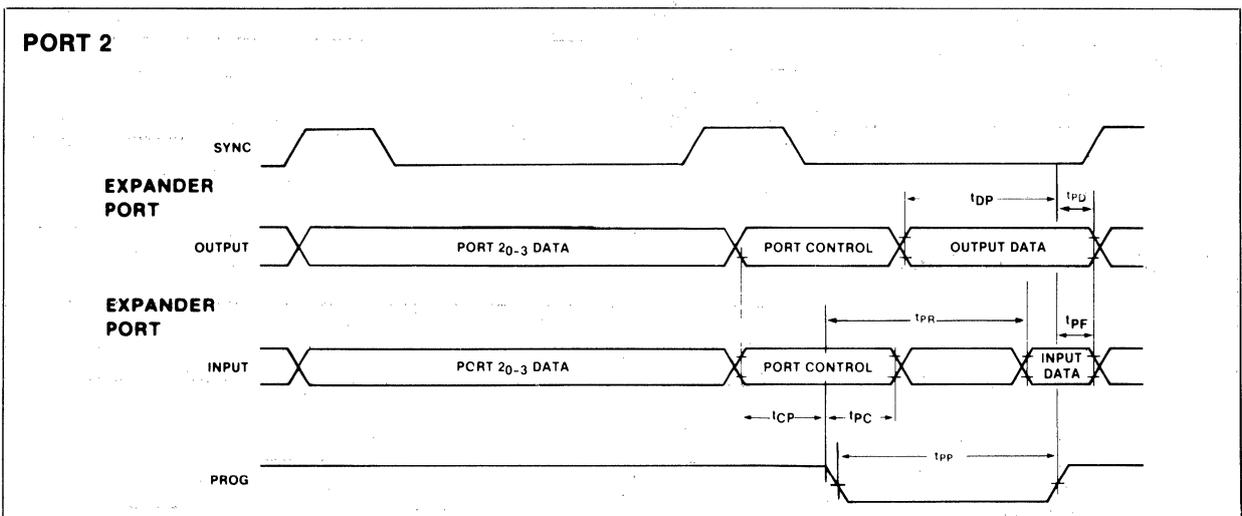
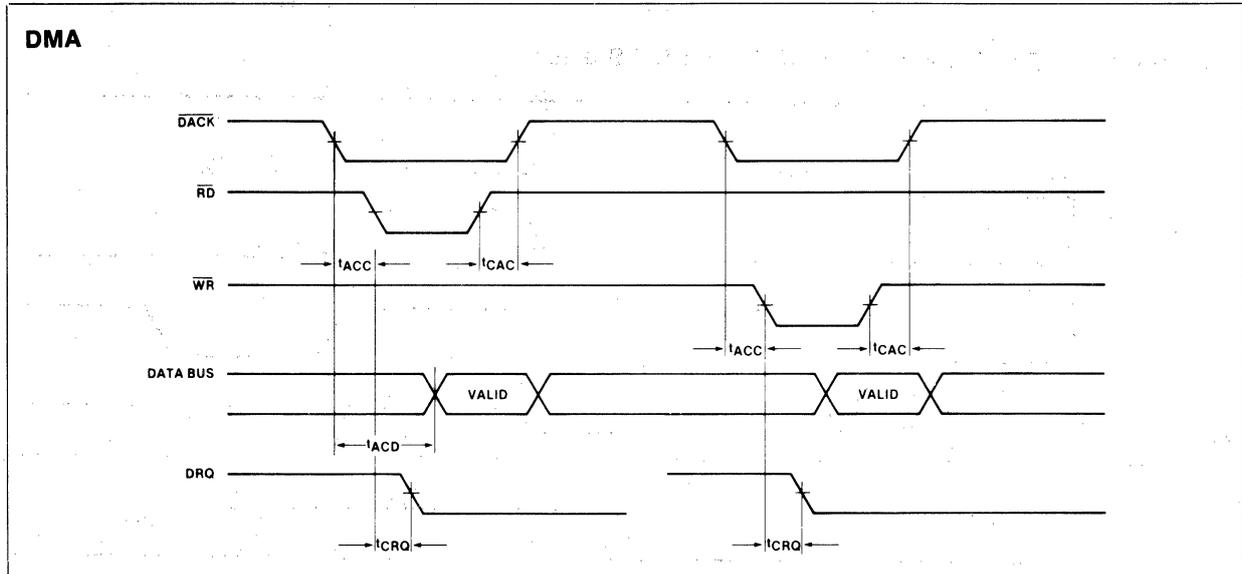


Table 2. UPI™ Instruction Set

| Mnemonic | Description | Bytes | Cycles | Mnemonic | Description | Bytes | Cycles |
|---------------------|--|-------|--------|----------------------|----------------------------------|-------|--------|
| ACCUMULATOR | | | | DATA MOVES | | | |
| ADD A, Rr | Add register to A | 1 | 1 | MOV A, Rr | Move register to A | 1 | 1 |
| ADD A, @Rr | Add data memory to A | 1 | 1 | MOV A, @Rr | Move data memory to A | 1 | 1 |
| ADD A, #data | Add immediate to A | 2 | 2 | MOV A, #data | Move immediate TO A | 2 | 2 |
| ADDC A, Rr | Add register to A with carry | 1 | 1 | MOV Rr, A | Move A to register | 1 | 1 |
| ADDC A, @Rr | Add data memory to A with carry | 1 | 1 | MOV @Rr, A | Move A to data memory | 1 | 1 |
| ADDC A, #data | Add immediate to A with carry | 2 | 2 | MOV Rr, #data | Move immediate to register | 2 | 2 |
| ANL A, Rr | AND register to A | 1 | 1 | MOV @Rr, #data | Move immediate to data memory | 2 | 2 |
| ANL A, @Rr | AND data memory to A | 1 | 1 | MOV A, PSW | Move PSW to A | 1 | 1 |
| ANL A, #data | AND immediate to A | 2 | 2 | MOV PSW, A | Move A to PSW | 1 | 1 |
| ORL A, Rr | OR register to A | 1 | 1 | XCH A, Rr | Exchange A and register | 1 | 1 |
| ORL A, @Rr | OR data memory to A | 1 | 1 | XCH A, @Rr | Exchange A and data memory | 1 | 1 |
| ORL A, #data | OR immediate to A | 2 | 2 | XCHD A, @Rr | Exchange digit of A and register | 1 | 1 |
| XRL A, Rr | Exclusive OR register to A | 1 | 1 | MOVP A, @A | Move to A from current page | 1 | 2 |
| XRL A, @Rr | Exclusive OR data memory to A | 1 | 1 | MOVP3, A, @A | Move to A from page 3 | 1 | 2 |
| XRL A, #data | Exclusive OR immediate to A | 2 | 2 | TIMER/COUNTER | | | |
| INC A | Increment A | 1 | 1 | MOV A, T | Read Timer/Counter | 1 | 1 |
| DEC A | Decrement A | 1 | 1 | MOV T, A | Load Timer/Counter | 1 | 1 |
| CLR A | Clear A | 1 | 1 | STRT T | Start Timer | 1 | 1 |
| CPL A | Complement A | 1 | 1 | STRT CNT | start Counter | 1 | 1 |
| DA A | Decimal Adjust A | 1 | 1 | STOP TCNT | Stop Timer/Counter | 1 | 1 |
| SWAP A | Swap nibbles of A | 1 | 1 | EN TCNTI | Enable Timer/Counter Interrupt | 1 | 1 |
| RL A | Rotate A left | 1 | 1 | DIS TCNTI | Disable Timer/Counter Interrupt | 1 | 1 |
| RLC A | Rotate A left through carry | 1 | 1 | CONTROL | | | |
| RR A | Rotate A right | 1 | 1 | EN DMA | Enable DMA Handshake Lines | 1 | 1 |
| RRC A | Rotate A right through carry | 1 | 1 | EN I | Enable IBF Interrupt | 1 | 1 |
| INPUT/OUTPUT | | | | DIS I | Disable IBF Interrupt | 1 | 1 |
| IN A, Pp | Input port to A | 1 | 2 | EN FLAGS | Enable Master Interrupts | 1 | 1 |
| OUTL Pp, A | Output A to port | 1 | 2 | SEL RB0 | Select register bank 0 | 1 | 1 |
| ANL Pp, #data | AND immediate to port | 2 | 2 | SEL RB1 | Select register bank 1 | 1 | 1 |
| ORL Pp, #data | OR immediate to port | 2 | 2 | NOP | No Operation | 1 | 1 |
| IN A, DBB | Input DBB to A, clear IBF | 1 | 1 | REGISTERS | | | |
| OUT DBB, A | Output A to DBB, set OBF | 1 | 1 | INC Rr | Increment register | 1 | 1 |
| MOV STS, A | A ₄ -A ₇ to Bits 4-7 of Status | 1 | 1 | INC @Rr | Increment data memory register | 1 | 1 |
| MOVD A, Pp | Input Expander port to A | 1 | 2 | DEC Rr | Decrement register | 1 | 1 |
| MOVD Pp, A | Output A to Expander port | 1 | 2 | SUBROUTINE | | | |
| ANLD Pp, A | AND A to Expander port | 1 | 2 | CALL addr | Jump to subroutine | 2 | 2 |
| ORLD Pp, A | OR A to Expander port | 1 | 2 | RET | Return | 1 | 2 |
| | | | | RETR | Return and restore status | 1 | 2 |

Table 2. UPI™ Instruction Set (Continued)

| Mnemonic | Description | Bytes | Cycles |
|---------------|--|-------|--------|
| FLAGS | | | |
| CLR C | Clear Carry | 1 | 1 |
| CPL C | Complement Carry | 1 | 1 |
| CLR F0 | Clear Flag 0 | 1 | 1 |
| CPL F0 | Complement Flag 0 | 1 | 1 |
| CLR F1 | Clear F1 Flag | 1 | 1 |
| CPL F1 | Complement F1 Flag | 1 | 1 |
| BRANCH | | | |
| JMP addr | Jump unconditional | 2 | 2 |
| JMPP @A | Jump indirect | 1 | 2 |
| DJNZ Rr, addr | Decrement register and jump | 2 | 2 |
| JC addr | Jump on Carry=1 | 2 | 2 |
| JNC addr | Jump on Carry=0 | 2 | 2 |
| JZ addr | Jump on A Zero | 2 | 2 |
| JNZ addr | Jump on A not Zero | 2 | 2 |
| JT0 addr | Jump on T0=1 | 2 | 2 |
| JNT0 addr | Jump on T0=0 | 2 | 2 |
| JT1 addr | Jump on T1=1 | 2 | 2 |
| JNT1 addr | Jump on T1=0 | 2 | 2 |
| JF0 addr | Jump on F0 Flag=1 | 2 | 2 |
| JF1 addr | Jump on F1 Flag=1 | 2 | 2 |
| JTF addr | Jump on Timer Flag = 1, Clear Flag = 0 | 2 | 2 |
| JNIBF addr | Jump on IBF Flag = 0 | 2 | 2 |
| JOBF addr | Jump on OBF Flag = 1 | 2 | 2 |
| JBb addr | Jump on Accumulator Bit | 2 | 2 |